


## RXLG 型铝外壳线绕电阻器 40W-2000W

RXLG Aluminum Housing Wire Wound Resistors 40W-2000W

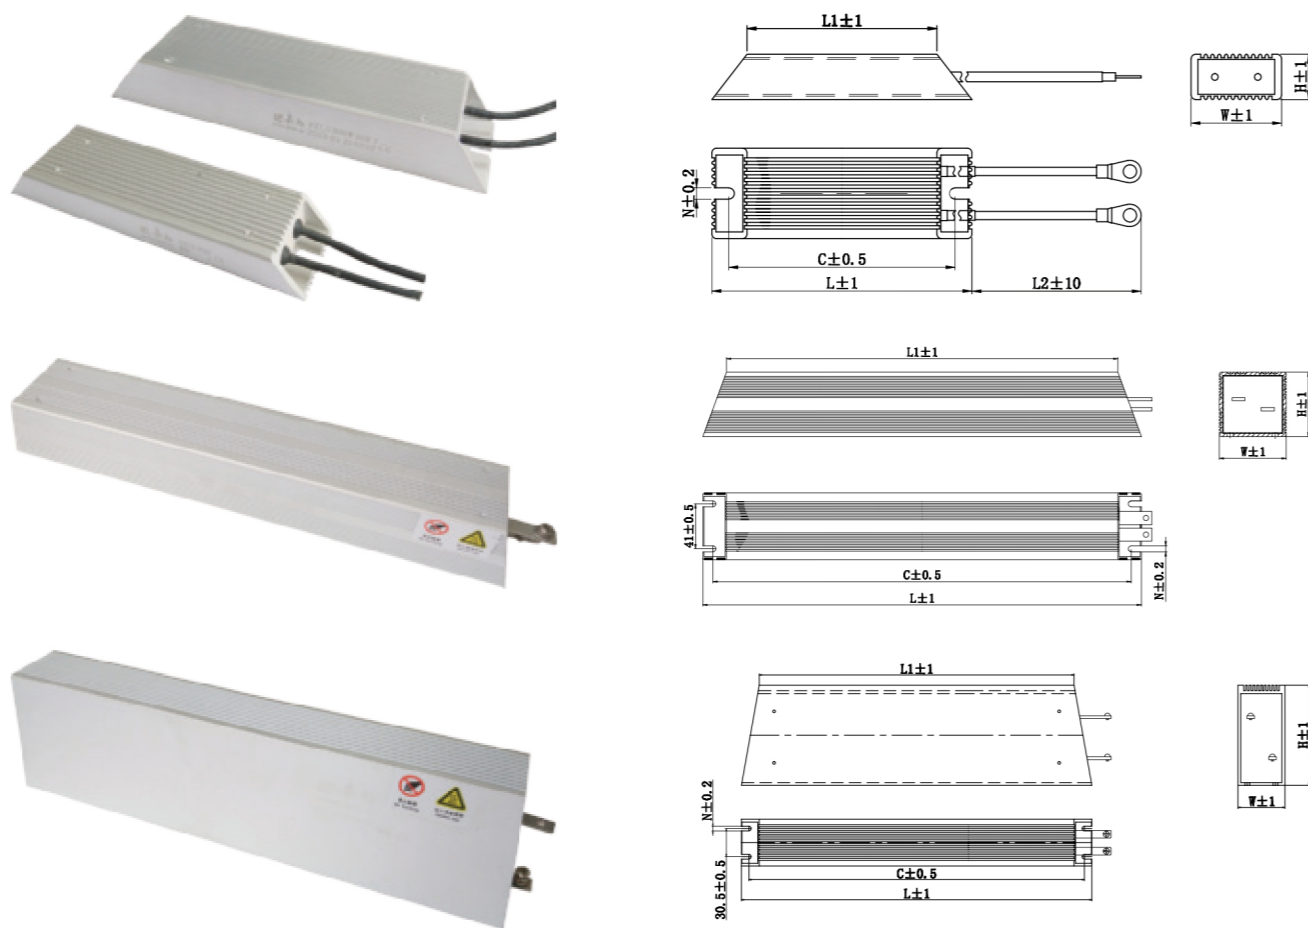

### 产品特点 Features

- 高温负荷特性优良  
Excellent high temperature load performance
- 高过载能力  
High over loading ability
- 符合欧盟 ROHS 标准  
ROHS compliant
- 外形美观、易于安装  
Attractive appearance and easy installation

### 应用范围 Applications

- 电力分配, 负荷测试  
Electric power distribution, load test
- 适用于功率电源 / 变频电源等领域  
Ideal for functional power supply / inverter power supply etc.
- 用于工控的伺服系统中软启动和制动部分  
Applied to the soft starting and braking parts of industrial controlled servo drive system

### 订货示例 How to order

产品型号 Type	功率 Power	标称阻值 Nominal value	精度 Tolerance
RXLG	300W	50R	±5%

## RXLG 型 40W-2000W 铝外壳线绕电阻器

RXLG Aluminum Housing Wire Wound Resistors 40W-2000W

### 主要性能技术指标 Main specification

型号 Type	功率 Power (W)	阻值范围 Resistance Range	阻值精度 Tolerances Range	外形尺寸 Dimensions (mm)							净重量 Net weight (g)
				L	L1	W	H	C	N	L2	
RXLG	40	1R ~ 1K	±5% (J) ±10% (K)	95	64	40	20	78	5.6	可定制	117
	60	1R ~ 1K		115	84			97	5.6		143
	80	1R ~ 1K		140	110			123	5.6		190
	100	1R ~ 2K0		165	135			148	5.6		223
	120	1R ~ 2K0		190	160			173	5.6		255
	150	1R ~ 2K0		215	185			198	5.6		300
	200	1R ~ 2K0		165	120	60	30	147	5.6		250
	300	1R ~ 2K0		215	170			197	5.6		620
	400	1R ~ 2K0		265	220			247	5.6		820
	500	1R ~ 2K0		335	290	61	59	317	5.6		1000
	600	1R ~ 20K0		335	293			317	5.6		1950
	800	1R ~ 20K0		400	357			382	5.6		2350
	1000	1R ~ 20K0		400	362			50	107		380
	1200	1R ~ 20K0		450	412	430	5.6				4200
	1500	1R ~ 20K0		485	447	463	5.6				4800
	2000	1R ~ 20K0		550	510	530	5.6				5250

### 降功耗曲线 Derating curve

